


GEARBOX HD450

Servogear HD450 gearbox is available as H-gear configuration, U-gear configuration and a PTI-gear configuration.

All Servogear gearboxes can be supplied with elastic gearbox suspensions and are type approved by DNV GL.

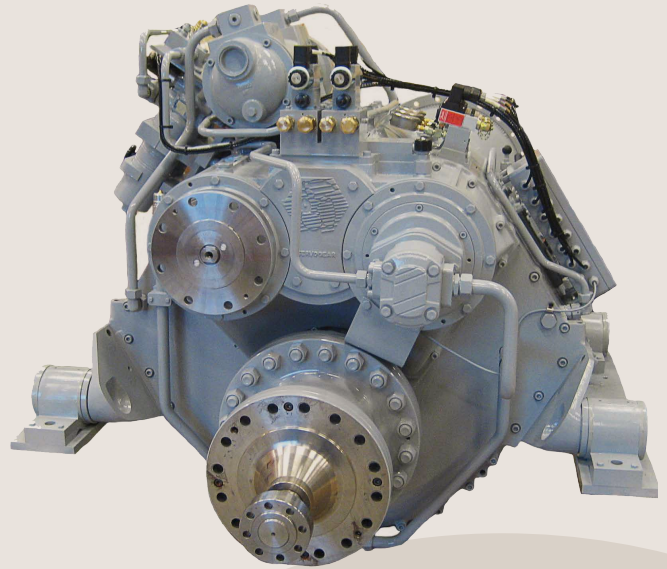

TECHNICAL SPECIFICATIONS

CONFIGURATION	KW/ RPM	TORQUE (NM)	STANDARD REDUCTION RATIOS	WEIGHT (dry, approx.kg)
U-drive	0,688	6580	5,00 : 1	1700
H-drive	0,688	6580	5,00 : 1	1725
PTI-drive	1,378	2 x 6580	5,00 : 1	1850

DIMENSIONS FOR PTI-DRIVE (MM)

